

Solenoid-Operated, 2-posion 2-way, Spool Valve
電磁閥 2位2口 滑閥

normally closed 常閉




normally open 常開



Technical Data 技術規格

Cavity 閥孔型號 T13A
Capacity 流量 ..... 45 l/min
Max. Pressure 最大壓力 ..... 350 bar
Leakage 洩漏量..... less than 100 cc/min
Torque 安裝扭力 ..... 40/50 Nm
Max. Current 最大電流 ..... 1150mA@12VDC, 590mA@24VDC
Power Consumption 能耗 ..... 22 watts
Body's Weight 本體重量 : 0.24 kg　　Coil's Weight 線圈重量 : 0.23 kg

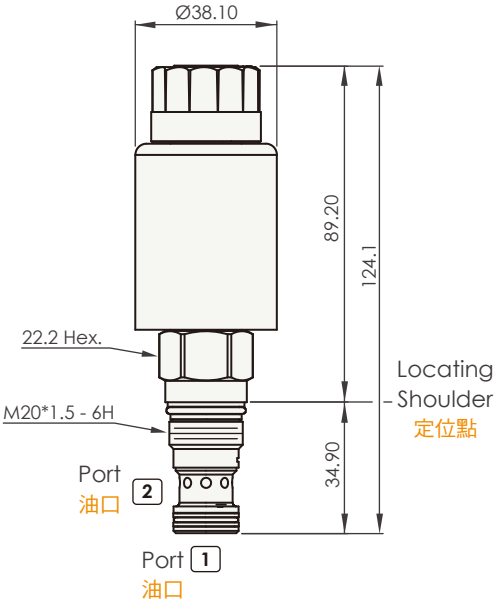

Option Ordering Information 選購型號


SDL 2 A - T13A - M C N - DA 24
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① **Model Code** 產品型號
② **Capacity (l/min)** 流量
2: 45
③ **Cavity** 閥孔型號
T13A
④ **Control** 控制方式
M: manual override 手動調整
⑤ **Type** 型式
C: normally closed 常閉
H: normally open 常開
⑥ **Seal** 油封材質
N: buna-N　V: viton
⑦ **Connector (coil)** 連接器
DA: ISO/DIN43650
TA: Deutsch DT04-2P
⑧ **Voltage (coil)** 電壓
12: 12 VDC
24: 24 VDC


Performance Curves 性能曲線

Typical Pressure Differential vs. Folw
壓差 vs. 流量

normally closed 常閉




normally open 常開



Valve Performance Limits @ 10% Undervoltage & Stabilized Coil Temperature
操作限制 (於 10% 電壓降及穩定線圈溫度)

normally closed 常閉



normally open 常開

