

Main Stage
主級

Pilot Operated Relief with Integral T8A Cavity
平衡式溢流閥 帶T8A導壓控制閥孔



Model Code 產品型號	Cavity 閥孔型號	Capacity 流量 (l/min)	Dimension 尺寸 (mm)			Torque 安裝扭力 (Nm)	Weight 重量 (kg)	Max. Pressure 最大壓力 (bar)
			a	b	c			
SRP2C8	T10A	95	39.7	22.2	19	40/50	0.09	350
SRP3C8	T3A	200	47.8	28.6	17.5	60/70	0.17	350
SRP6C8	T16A	380	61.9	31.8	24.6	200/215	0.43	350
SRP8C8	T18A	760	79.4	41.3	30.2	465/500	0.59	350

* T8A pilot capacity relief is not included and has to be ordered separately. Refer to SRB1P
* 本產品不包含 T8A 導壓控制用溢流閥，訂購資訊可參考 SRB1P。

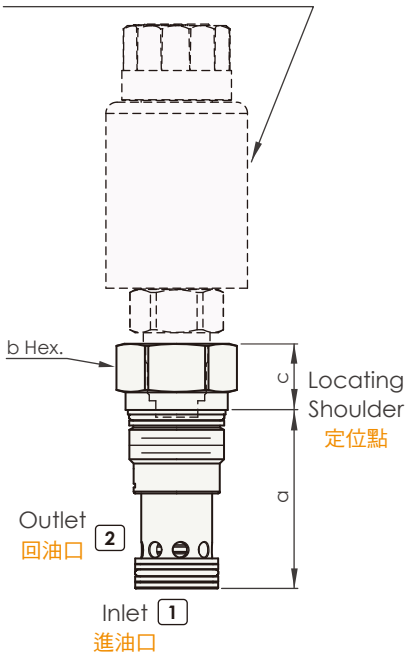

Option Ordering Information 選購型號

SRP 3 C - T3A - 8 W N
① ② ③ ④ ⑤ ⑥

① **Model Code** 產品型號

② **Capacity (l/min)** 流量
2: 95 3: 200 6: 380 8: 760

② **Cavity** 閥孔型號
T10A T3A T16A T18A

④ **Control** 控制方式
8: integral cavity T8A 導壓控制閥孔

⑤ **Cracking Pressure (bar)** 開 / 關閥壓力
W: 7 D: 1.7

⑥ **Seal** 油封材質
N: buna-N V: viton

Performance Curves 性能曲線

Typical Pressure Rise
洩壓曲線

