

# Pilot Operated Reducing Valve with Integral T8A Cavity
## 平衡式減壓閥 帶T8A導壓控制閥孔




| Model Code 產品型號 | Cavity 閥孔型號 | Capacity 流量 ( l/min ) | Dimension 尺寸 ( mm ) | | | Torque 安裝扭力 ( Nm ) | Weight 重量 ( kg ) | Max. Pressure 最大壓力 ( bar ) |
|---|---|---|---|---|---|---|---|---|
| | | | a | b | c | | | |
| SPB2B8 | T11A | 40 | 35.1 | 22.2 | 30.2 | 45/50 | 0.09 | 350 |
| SPB3B8 | T2A | 80 | 35.1 | 28.6 | 35.1 | 60/70 | 0.17 | 350 |
| SPB6B8 | T17A | 160 | 46 | 31.8 | 46 | 200/215 | 0.43 | 350 |
| SPB8B8 | T19A | 320 | 63.5 | 41.3 | 58.7 | 465/500 | 0.59 | 350 |

* T8A pilot capacity relief is not included and has to be ordered separately. Refer to SPB2B.
* 本產品不包含 T8A 導壓控制用溢流閥，訂購資訊可參考 SPB2B。

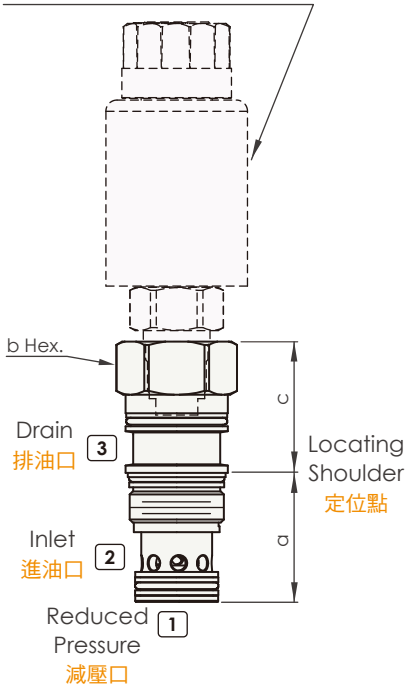


## Option Ordering Information 選購型號

**SPB 3 B - T2A - 8 W N**
① ② ③ ④ ⑤ ⑥

① **Model Code** 產品型號

② **Capacity (l/min)** 流量
2: 40 3: 80 6: 160 8: 320

② **Cavity** 閥孔型號
T11A T2A T17A T19A

④ **Control** 控制方式
8: integral cavity T8A 導壓控制閥孔

⑤ **Cracking Pressure (bar)** 開 / 關閥壓力
W: 7 D: 1.7

⑥ **Seal** 油封材質
N: buna-N V: viton

## Performance Curves 性能曲線

**No Load Pressure Drop**
空載壓降曲線

